


# SPORT COMPACT COMPETITION PLUS VALVES

Part N°	Type	Head Diam.	Stem Diam.	Overall Length	Tip Length	References
<b>GM 5 CYLINDER - L5</b>						
F1948P	E	30.15 mm	5.96 mm	108 mm	5.5 mm	22° Flo. Stock size
F1949P	E	31.15 mm	5.96 mm	108 mm	5.5 mm	22° Flo. 1 mm oversize
F1950P	I	37 mm	5.97 mm	105.5 mm	5.5 mm	20° Super Flo. Stock size
F1951P	I	38 mm	5.97 mm	105.5 mm	5.5 mm	20° Super Flo. 1 mm oversize
<b>HONDA ACCORD 2.2L - SOHC 16 VALVE (F22B2-F22B6) - 1994-1995</b>						
F1900P	E	29 mm	5.46 mm	123.55 mm	4.00 mm	22° Flo. Stock size. Super Alloy
F1901P	E	30 mm	5.46 mm	123.55 mm	4.00 mm	22° Flo. 1 mm oversize. Super Alloy
F1902P	I	32 mm	5.48 mm	112.10 mm	2.50 mm	20° Super Flo. Stock size
F1903P	I	33 mm	5.48 mm	112.10 mm	2.50 mm	20° Super Flo. 1 mm oversize
<b>HONDA ACCORD 2.2L - SOHC V-TEC 16 VALVE (F22B1) - 1994-1997</b>						
F1801P	E	29 mm	5.46 mm	114.25 mm	3.5 mm	25° Flo. Stock size. Super Alloy
F1803P	E	30 mm	5.46 mm	114.25 mm	3.5 mm	25° Flo. 1 mm oversize. Super Alloy
F1800P	I	34 mm	5.48 mm	116 mm	3.5 mm	25° Super Flo. Stock size
F1802P	I	35 mm	5.48 mm	116 mm	3.5 mm	25° Super Flo. 1 mm oversize
<b>HONDA CIVIC 1.6L - SOHC 16 VALVE (D16Z6-Y5-Y7-Y8) - 1992-2000</b>						
F1821P	E	26 mm	5.46 mm	115.95 mm	1.9 mm	22° Flo. Stock size. Super Alloy
F1495P	E	27 mm	5.46 mm	115.95 mm	1.9 mm	22° Flo. 1 mm oversize. Super Alloy
F1822P	I	30 mm	5.48 mm	118.6 mm	1.9 mm	20° Super Flo. Stock size
F1494P	I	31 mm	5.48 mm	118.6 mm	1.9 mm	20° Super Flo. 1 mm oversize
<b>HONDA CIVIC CRX SI 1.6L - SOHC 16 VALVE (D16A6) - 1988-1991</b>						
F1857P	E	25 mm	5.5 mm	118.75 mm	4.35 mm	25° Flo. Stock size. Super Alloy
F1858P	E	26 mm	5.5 mm	118.75 mm	4.35 mm	25° Flo. 1 mm oversize. Super Alloy
F1855P	I	29 mm	5.5 mm	115 mm	4.1 mm	25° Super Flo. Stock size
F1856P	I	30 mm	5.5 mm	115 mm	4.1 mm	25° Super Flo. 1 mm oversize
<b>HONDA DEL SOL 1.6L - DOHC V-TEC 16 VALVE (B16A1) - 1994-1997</b>						
<b>HONDA CIVIC SI 1.6L - DOHC V-TEC 16 VALVE (B16A3) - 1999-2000</b>						
F1449P	E	28 mm	5.45 mm	102.5 mm	2.5 mm	25° Flo Stock size. Super Alloy
F1447P	E	28.5 mm	5.45 mm	102.5 mm	2.5 mm	25° Flo - .5 mm oversize. Super Alloy
F1445P	E	29 mm	5.45 mm	102.5 mm	2.5 mm	25° Flo - 1 mm oversize. Super Alloy
F1448P	I	33 mm	5.47 mm	102.35 mm	2.5 mm	25° Super Flo. Stock size
F1446P	I	33.5 mm	5.47 mm	102.35 mm	2.5 mm	25° Super Flo - .5 mm oversize
F1444P	I	34 mm	5.47 mm	102.35 mm	2.5 mm	25° Super Flo - 1 mm oversize
<b>HONDA CRV 2.0L - DOHC 16 VALVE (B20A-B20Z) - 1997-2000</b>						
F1815P	E	28 mm	6.54 mm	106.02 mm	4.1 mm	30° Flo Dish Head - Stock soze. Super Alloy
F1488P	E	28.5 mm	6.54 mm	106.02 mm	4.1 mm	30° Flo Dish Head - .5 mm oversize. Super Alloy
F1489P	E	29 mm	6.54 mm	106.02 mm	4.1 mm	30° Flo Dish Head - 1 mm oversize. Super Alloy

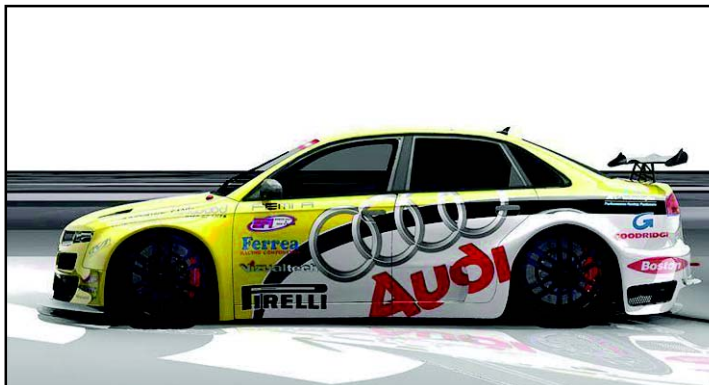

*Audi A4 all-wheel drive of Femi Adegole has put the standard in leading the European Tuner market into a spin, pumping out 600HP and 600 ft-lbs of torque on twin turbos. Audi Race Team inspired A4 uses nothing but **Ferrea Valvetrain**.*